


Note: Non standard sizes on request

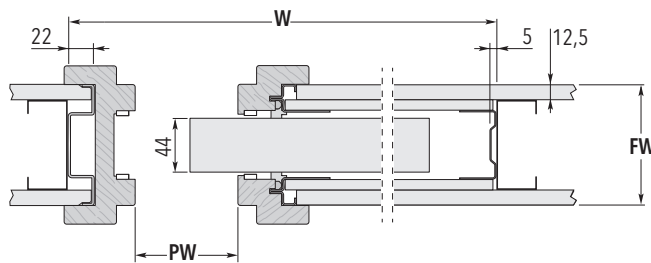

PLEASE NOTE INBUILT TOLERANCE

If setting out your studwork before delivery of your frame please note there is approximately an 8mm tolerance built into the height of these pocket door systems which you will need to take into account. Packers may be required to accommodate for this gap if you are unable to adjust the studwork above the system.

Note: Frame should be installed at finished floor level.

FRAMES FOR SINGLE DOORS			DOOR PANELS UK	
MAX. PASSAGE SIZE PW x PH	OVERALL DIMENSION W x H	FINISHED WALL FW	DW	DH
578 x 2010	1294 x 2120	100	626	2040
678 x 2010	1494 x 2120	100	726	2040
778 x 2010	1694 x 2120	100	826	2040
878 x 2010	1894 x 2120	100	926	2040
978 x 2010	2094 x 2120	100	1026	2040
563 x 1951	1279 x 2061	100	2ft. 0in. x 6ft. 6in. (610 x 1981 mm)	
639 x 1951	1455 x 2061	100	2ft. 3in. x 6ft. 6in. (686 x 1981 mm)	
715 x 1951	1631 x 2061	100	2ft. 6in. x 6ft. 6in. (762 x 1981 mm)	
791 x 1951	1707 x 2061	100	2ft. 9in. x 6ft. 6in. (838 x 1981 mm)	
878 x 1951	1894 x 2061	100	3ft. 0in. x 6ft. 6in. (914 x 1981 mm)	

Dimensions are given in mm



NOTES

- ▶ Suitable for 44 mm thick FD30 timber doors (not supplied).
- ▶ Bespoke sizes available - please contact us for details.
- ▶ One layer of 12.5 mm fireboard each side (not supplied).
- ▶ Finished wall thickness 100 mm (frame thickness 75 mm).
- ▶ Supplied with special jambs with integrated architrave.
- ▶ FD30 door and fireboard not supplied.
- ▶ Use 15 x 4 mm graphite based intumescent strips.
- ▶ Self centering floor guide with anti-warp profile.
- ▶ Install at finished floor level.
- ▶ Max. door panel weight 100 kg.



ACCESSORIES

- ▶ **Self Closing Mechanism***
Open the door and it closes by itself!
- ▶ **ECLISSE BIAS®**
Soft close up to 40 kg with anti-slam

* Please check first with your Building Inspector prior to ordering to determine whether or not your particular project will require a self-closer.



INTERNATIONAL FIRE CONSULTANTS GROUP

The system was tested to BS EN 1634-1:2008 for fire resistance at Cambridge Fire Research which is an independent UKAS accredited testing laboratory.



Sliding Pocket Door Systems

ECLISSE UK - Richmond House - Occupation Lane - Gonerby Moor - Grantham - Lincs NG32 2BP
Tel: 0333 577 0828 - info@eclisse.co.uk - www.eclisse.co.uk